

KC2-OSH-CD Two-Wire Conventional Smoke and Heat Combination Detector



Effective: August 2026
K-70-370

STANDARD FEATURES

- **Photoelectric Smoke Detection and Dual Rate-of-Rise and Fixed-Temperature Heat Detection In One Two-Wire Conventional Detector**
- **Multi-criteria optical smoke sensing technology**
- **Compatible with Kidde Fire Systems AEGIS™ -PHX, AEGIS™ 2.0 and AEGIS™ -XLT Conventional Control Units**
- **Advanced alarm verification feature reduces chance of nuisance alarms**
- **Self-diagnostic capability continually monitors operation**
- **Remote LED indicator available**
- **Low-profile design blends into the ceiling**
- **FM Approved**
- **cULus Listed**
- **California State Fire Marshal Listed**

DESCRIPTION



The KC2 Optical Smoke and Heat Combination Detector is a conventional low-profile, self-diagnostic, two-wire photoelectric smoke detector combined with a rate-of-rise and fixed-temperature heat sensor. The advanced photoelectric sensing chamber detects smoke from a fire versus nuisance smoke from non-fire sources. The rate-of-rise heat sensor quickly detects a fast, flaming fire. The fixed-temperature heat

sensor detects fire when the air temperature near the detector exceeds the alarm point of 135 °F (nominal). Advanced smoke detection combined with heat detection makes the KC2-OSH-CD detector suitable not only for commercial and industrial environments, but also life safety protection.

COMPATIBLE BASES

The KC2-OSH-CD detector head attaches easily to either a KC2-SB Standard or KC2-RB Relay Base. Detector bases have wiring terminals that are accessible from the "room-side" after mounting the base to the electrical box.

- **Model KC2-SB/-SB4 Standard Base:** Connects the detector to circuit.
- **Model KC2-RB/-RB4 Relay Base:** Connects the detector to circuit and provides optional Relay functionality to the KC2 series detector. (The base's relay contacts automatically change state when detector goes into Alarm.)

TRIM SKIRT

A trim skirt is supplied with the KC2-SB4 and KC2-RB4 bases to help hide mounting tabs. The GSA-TS trim skirt may optionally be ordered for KC2-RB or KC2-SB bases if desired.



STATUS LED

KC2-OSH-CD detectors use an LED to indicate the detector's condition. A flashing green LED every 30 seconds indicates Normal condition. A Trouble condition is indicated by a flashing green LED every 5 seconds. A steady red LED indicates an Alarm condition. An optional Remote LED Indicator is available for convenient viewing.

INSTALLATION

KC2 Standard and Relay bases mount to:

- North American single-gang box
- Octagon box 3-1/2 in. (89 mm) by 1-1/2 in. (38 mm) deep
- Octagon box 4 in. (102 mm) by 1-1/2 in. (38 mm) deep
- European single-gang box 75 mm with 60.3 mm fixing centers
- BESA box with 60.3 mm fixing centers
- Square box 4 in. (102 mm) by 1-1/2 in. (38 mm) deep (KC2-SB4 or KC2-RB4 base required)

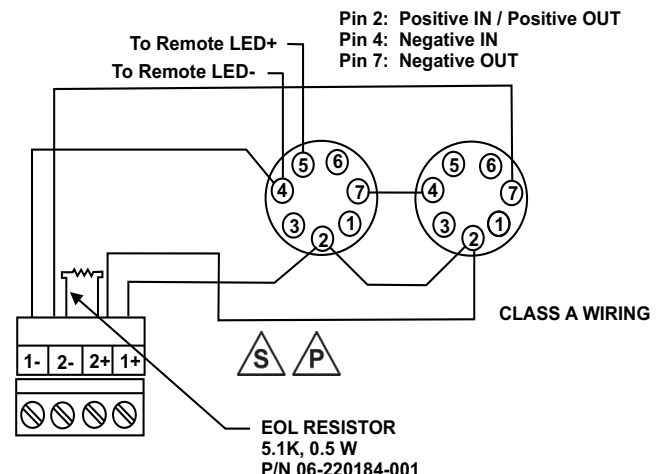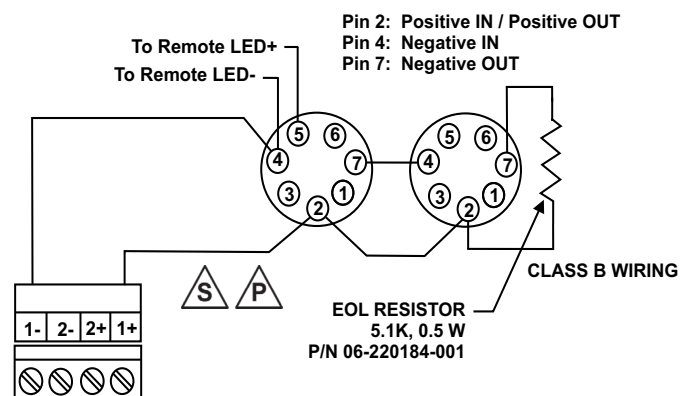

TECHNICAL SPECIFICATIONS

Electrical/Environmental	
Operating Voltage	6.5 to 33 VDC
Standby Current	88 µA at 18 VDC 145 µA at 33 VDC
Alarm Current	up to 60 mA maximum, if not limited by control unit
Remote LED Output Current	0.225 mA average (50 msec ON, 1 sec OFF)
Reset Voltage	2.5 V, maximum
Reset Time	1 second, minimum
Vibration Level	10 to 35 Hz, with an amplitude of 0.01 in.
Photoelectric Sensitivity	0.5 to 4.36 %/ft. obscuration (1.63 to 13.62 %/m)
Air velocity	0 to 4000 ft/min (0 to 20.32 m/s)
Rate-of-rise	15 °F/min (8 °C/min)
Fixed Temperature	135 °F (57.2 °C)
Actual Alarm Point	129 to 141 °F (53.9 to 60.6 °C)
Environmental Compensation	Automatic
Response Time Index (evaluated by FM Approvals)	Quick
Operating Temperature Range	32°F to 100°F (0°C to 38°C)
Relative Humidity Range	0 to 93% noncondensing
Storage Temperature	-4 to 140 °F (-20 to 60 °C)
LED Indicator	Normal = Green every 30 seconds Alarm = Steady Red Trouble = Green every 5 seconds
UL Two-Wire Detector Compatibility Identifier	S10AR2
Compatible Bases	KC2-SB, KC2-SB4, KC2-RB, KC2-RB4
Wall Mounting: Distance from Ceiling	12 in. (305 mm) maximum

Physical	
Color	White head and base
Detector Head Dimensions	4.375 in. D x 2.25 in. H (11.10 cm x 5.70 cm)
Base Dimensions	4.4 in. D x 0.75 in. H (11.18 cm x 1.90 cm)
Total Height (head and base)	2.625 in. (6.67 cm) H

ORDERING INFORMATION

KC2-OSH-CD	Optical Smoke and Heat Combination Detector, head only, two-wire
KC2-SB	Standard Base for KC2 Series Detectors with output for Remote LED, 4 in. diameter
KC2-SB4	Standard Base for KC2 Series Detectors with output for Remote LED, 4 in. diameter (with tabs for 4-in. square box; includes trim skirt)
KC2-RB	Relay Base for KC2 Series Detectors, 4 in. diameter
KC2-RB4	Relay Base for KC2 Series Detectors, 4 in. diameter (with tabs for 4-in. square box; includes trim skirt)
GSA-TS	Optional Trim Skirt for KC2 Series Bases
GSA-LED	Optional Remote LED Alarm Indicator (for use with KC2-SB and KC2-SB4 Standard Bases Only)
SIGA-RTA	Optional Removal Tool (attaches to standard telescoping pole)
SM200-12PKG	Canned smoke for functional testing of smoke detectors

NOTE: Refer to Kidde Fire Systems Datasheets K-70-300 and K-84-901 for smoke detector compatibility.

NOTE: Refer to Kidde Fire Systems Datasheets K-70-300 and K-84-901 for smoke detector compatibility.

This literature is provided for informational purposes only. Kidde-Fenwal, LLC believes this data to be accurate, but it is published and presented without any guarantee or warranty whatsoever. Kidde-Fenwal, LLC assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, LLC, Ashland, MA 01721.

Kidde-Fenwal, LLC
400 Main Street
Ashland, MA 01721, USA

KFI U.K. Limited
Station Road,
Bentham, Lancaster, LA2 7NA, UK

Kidde Technologies
Survey No. 28/2, 44/2 and 45
Rasyani, Dandapta Road
Raigad Maharashtra-410207, India



EXPORT INFORMATION (USA)

Jurisdiction: EAR

Classification: EAR99

This document contains technical data subject to the EAR.

kiddefenwal.com | 508.881.2000

Kidde Fire Systems, Kidde Fire Protection and Fenwal Controls branded products are created exclusively by Kidde-Fenwal, LLC.
All other trademarks are the property of their respective owners.
2026 © Kidde-Fenwal, LLC | All Rights Reserved

P/N: K-70-370 Rev AC